

Electronic Heavy Duty Throttle Pedal 962 000 series



1. Mechanical Specifications:

- Two “built-in” return springs
- Additional return spring built in the sensor
- Die cast aluminium treadle and mounting plate
- Complies with FMVSS 124

Travel angle	22°
Angle option	30°, 35°, 45°
Protection classification	IP66 (IP67 if LHE sensor)
Storage temperature	-40°C to +95°C
Operating temperature	-40°C to +85°C
Connector	AMP - 6 pins - waterproof (IP69)

- **Options:**
 - Kick down virtual feedback and kick down signal
 - Twin sensors
 - Connector kit or customized wire harness
- Technical specification sheet and part numbers are available upon request

2. Electrical Specifications:

- Complies with 72/245/EEC
- E1 number 03 5754

All Electronic Throttle Controls are fitted with programmable Hall Effect Sensors.

The signals generated by the Electronic Throttle Controls will allow a smooth and precise engine speed control.

The output values are programmable and hence can be adapted to the customer’s specifications. Electronic Throttle Controls can be connected directly to the engine management system, or engine Electronic Control Module.

For available programmable sensor models, please refer to pages 3 and 4.

A/ Programmable single analogue sensor with programmable electronic Idle Validation Switch (IVS)

Analogue channel :

Current consumption	< 7,5mA
Supply (Vs)	Between 5V and 28 V DC
Output signal value	Between 5% and 95% (+/- 1%) of 5V DC
Output current	Max 1mA




Switch channel option 1 :

Current consumption	< 10mA
Supply (Vs)	Between 8V and 36V DC
Idle Validation Switch	Configurable (Open collector, Pull-up or Pull-down)
Output current	Max 10mA

Switch channel option 2 :

Current consumption	< 10mA
Supply (Vs)	Between 8V and 36V DC
Redundant Idle Validation Switch (2 outputs)	Output 1 : High - Low (5 - 0V) Output 2 : Low - High (0 - 5V)
Output current	Max 1mA / output


Examples:

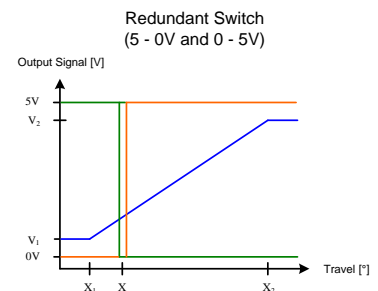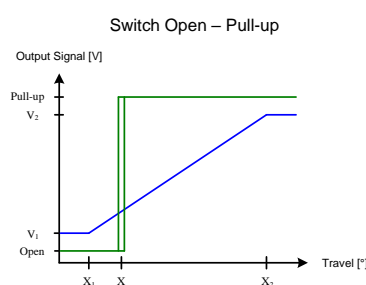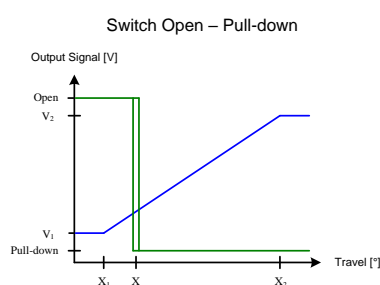

B/ Programmable dual output analogue sensor

Current consumption	< 8mA / channel
Supply (Vs)	5V DC / channel
Output channel #1	Between 5% and 95% (+/- 1%) of Vs
Output channel #2	Between 5% and 95% (+/- 1%) of Vs
Output current	Max 1mA / channel

Examples:

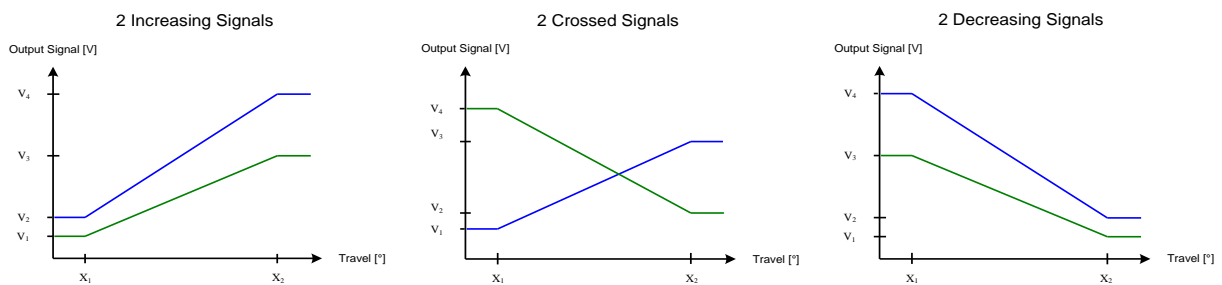

C/ Programmable single or dual output digital sensor (PWM)


Digital channel(s):

Current consumption	< 12mA / channel
Supply (Vs)	Between 8 and 36 V DC
Output channel #1	Duty cycle between 5% and 95% (+/- 1%)
Output channel #2	Duty cycle between 5% and 95% (+/- 1%)
Frequency	200Hz to 500Hz +/-15%
Output current	Max 10mA / channel

Optional switch channel with single digital output:

Current consumption	< 10mA
Supply (Vs)	Between 8V and 36V DC
Idle Validation Switch	Configurable (Open collector, Pull-up or Pull-down)
Output current	Max 10mA

Examples:

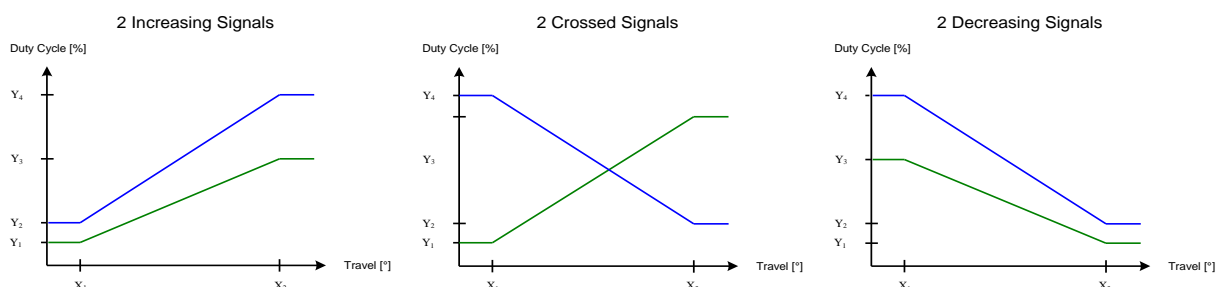

3. Options:

A/ CAN J1939

J1939 Parameters:

- J1939 Messages and signals can be activated according to MCS Throttle default values or customer specifications.
- J1939 Parameters like SA (Source Address) or NAME fields can be set according to MCS Throttle default values or customer specifications.
- Optional messages such as DTC (DMx, FMI, MIL, ...) can be activated upon customer request.


Electrical specifications:

Power Supply	+8 .. 32VDC
Current consumption	40mA max.
J1939 Connector	Deutsch #DT06-3S (J1939/11)



B/ 4-20mA current output signals

Power Supply	+8 .. 32VDC
Current output signal	4 - 20mA

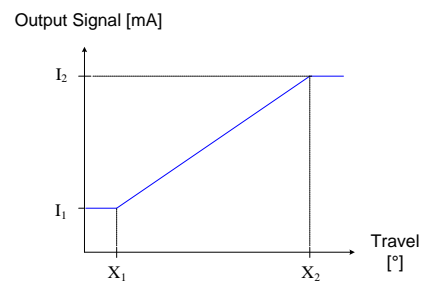

C/ Customized parts available



With wire harness and special mounting plate



With a swivel arm





With a rubber cover (with or without logo in color black or red)



With twin sensor (up to 4 output signals)

4. Drawings:

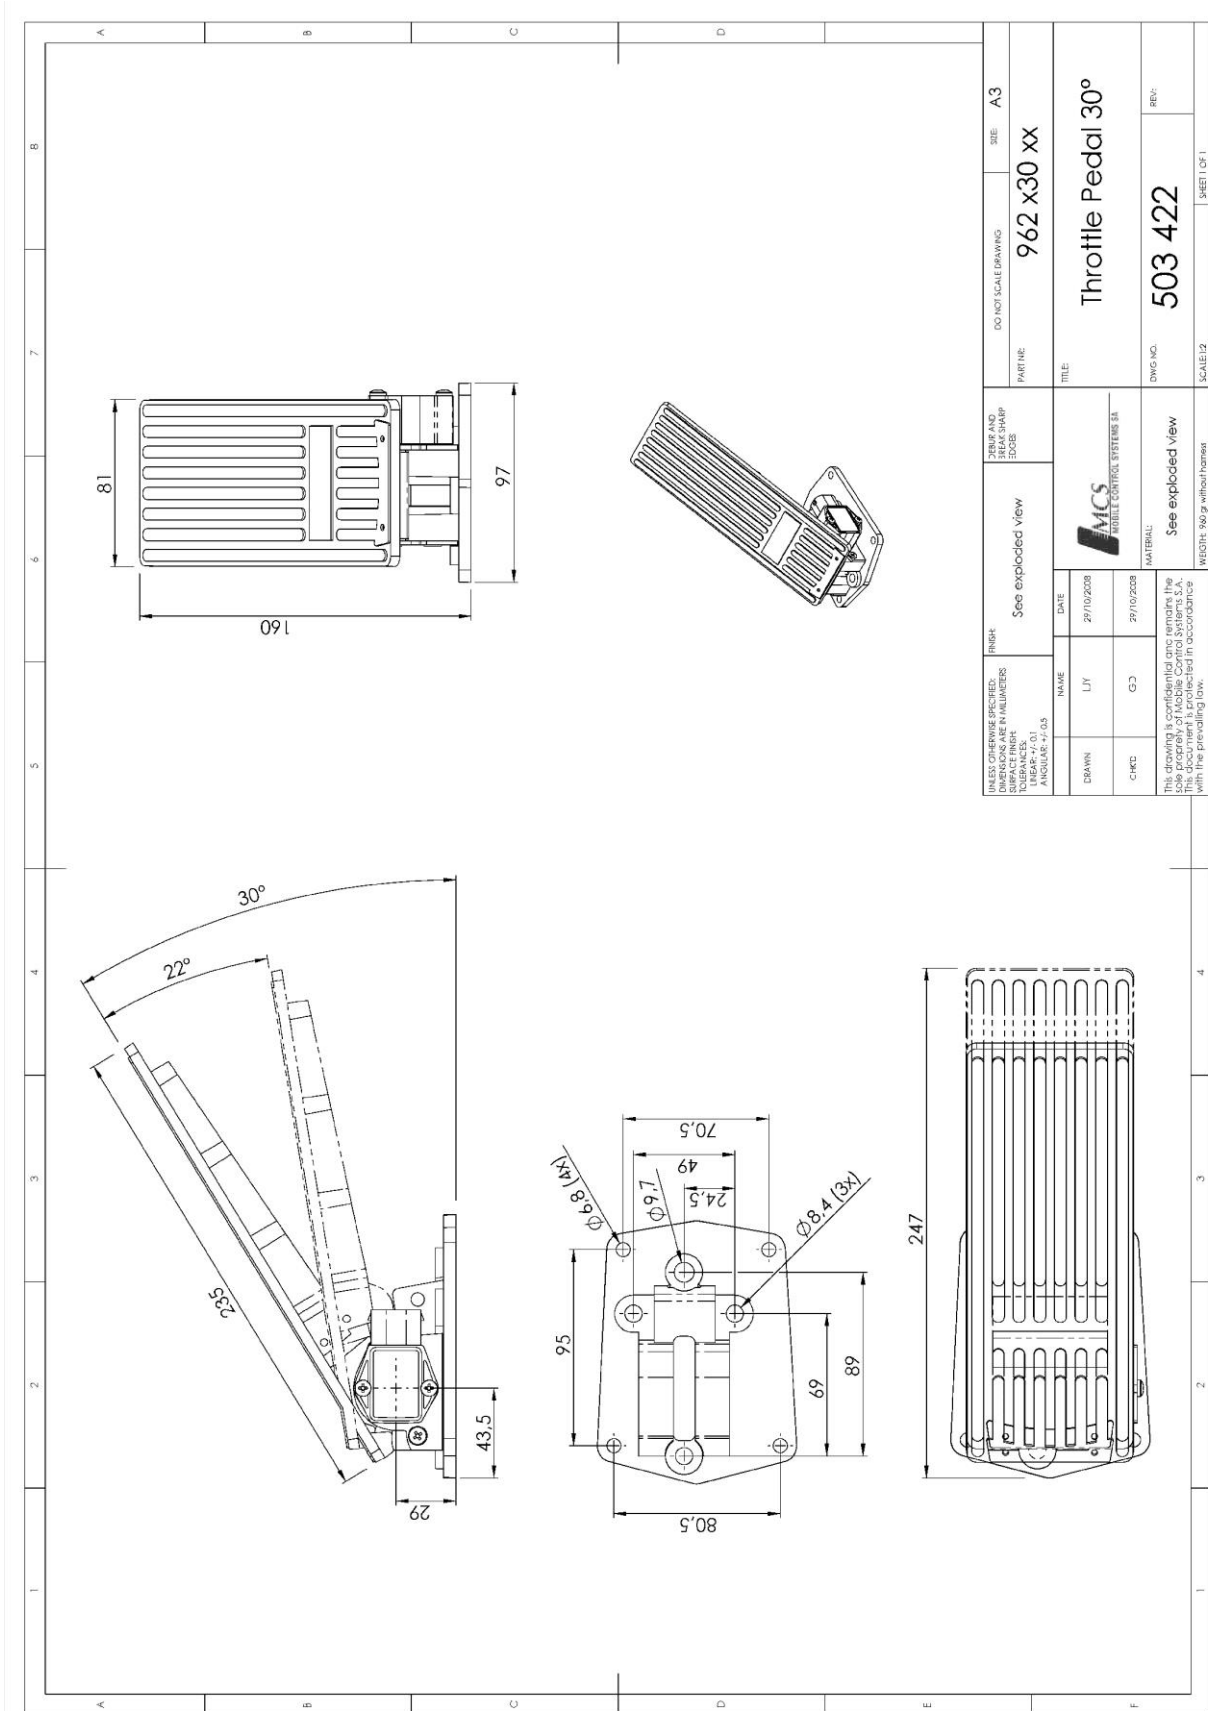

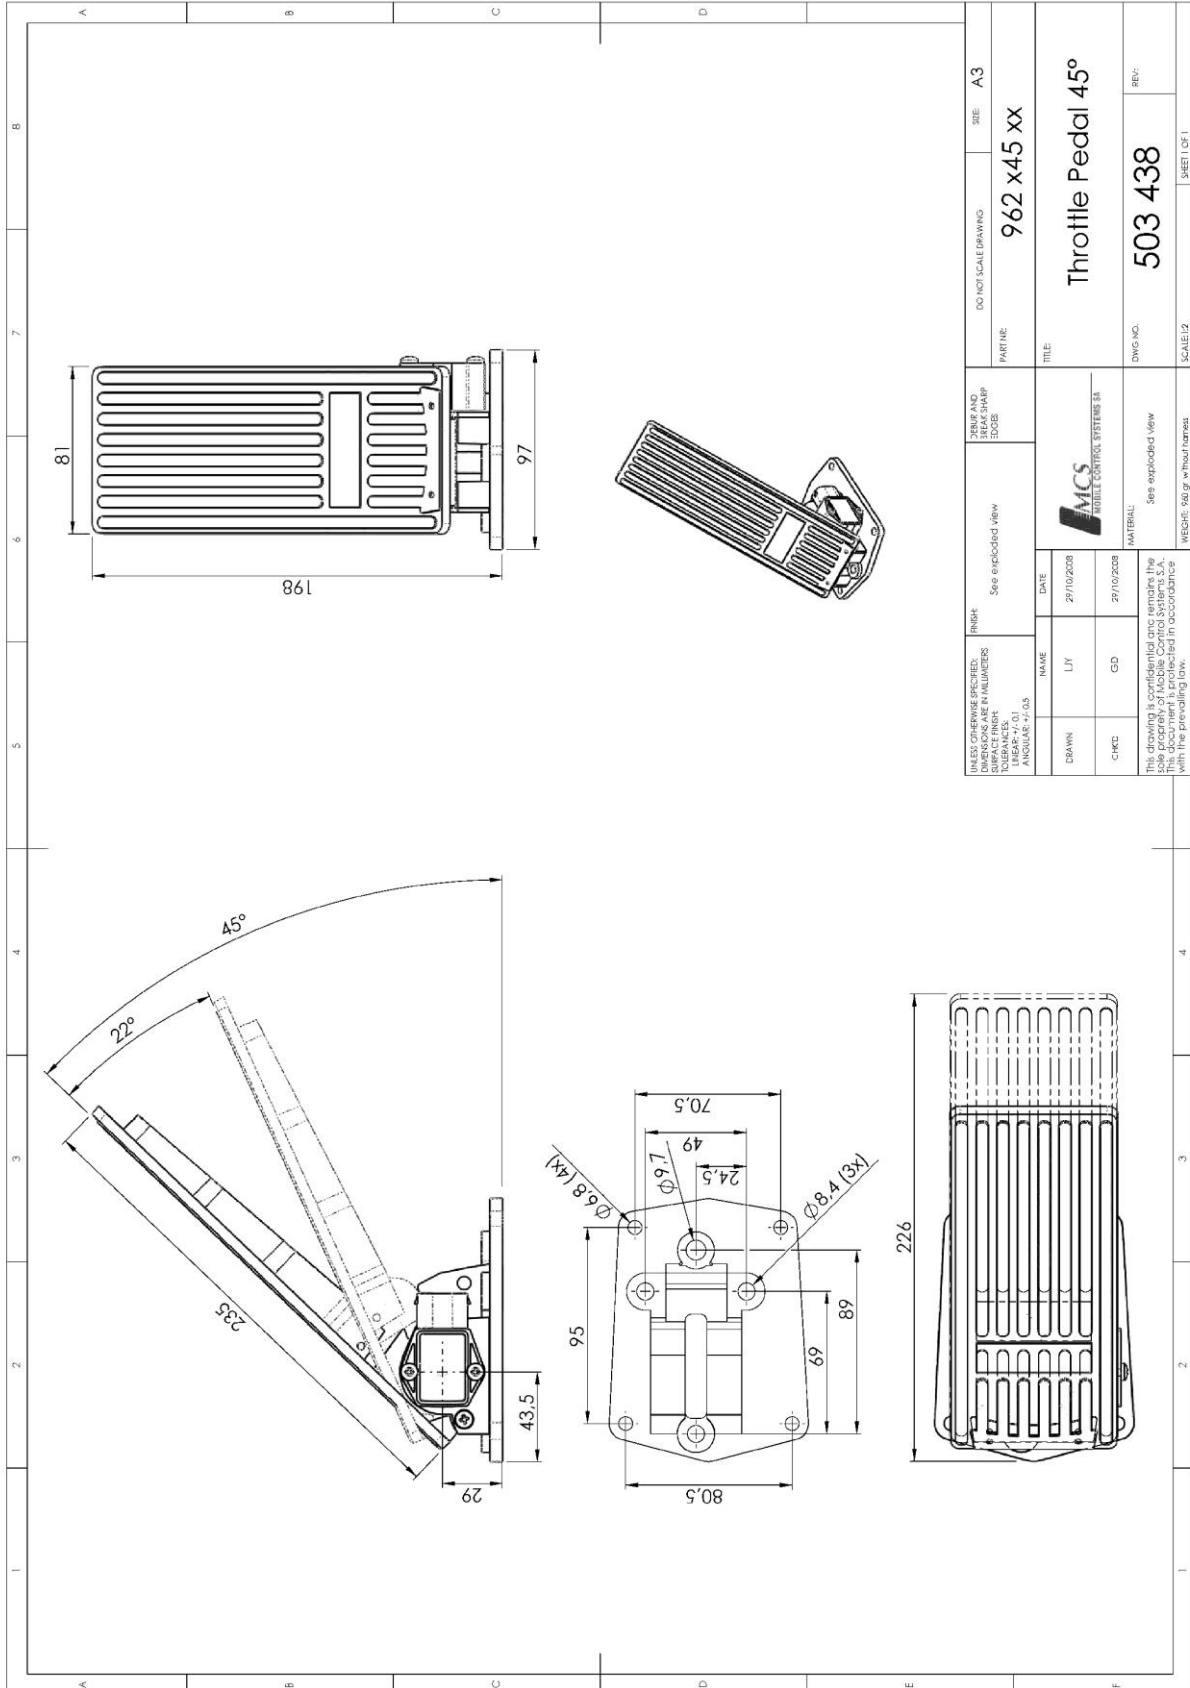

5. Typical Applications:



6. Compatible with the following engines:

- | | | |
|------------------|-----------------|-------------------|
| • CATERPILLAR | • JCB | • PERKINS |
| • CUMMINS | • JOHN DEERE | • RENAULT |
| • DACHAI | • KUBOTA | • SCANIA |
| • DEAWOO | • LIEBHERR | • SHANGHAI DIESEL |
| • DAF | • LOVOL | • SISU DIESEL |
| • DETROIT DIESEL | • MAN | • VOLKSWAGEN |
| • DEUTZ | • MERCEDES-BENZ | • VOLVO |
| • HINO | • MTU | • WEICHAI |
| • ISUZU | • NAVISTAR | • YANMAR |
| • IVECO | • NISSAN | • YUCHAI |